


Leadership In True 3D CAE Technology

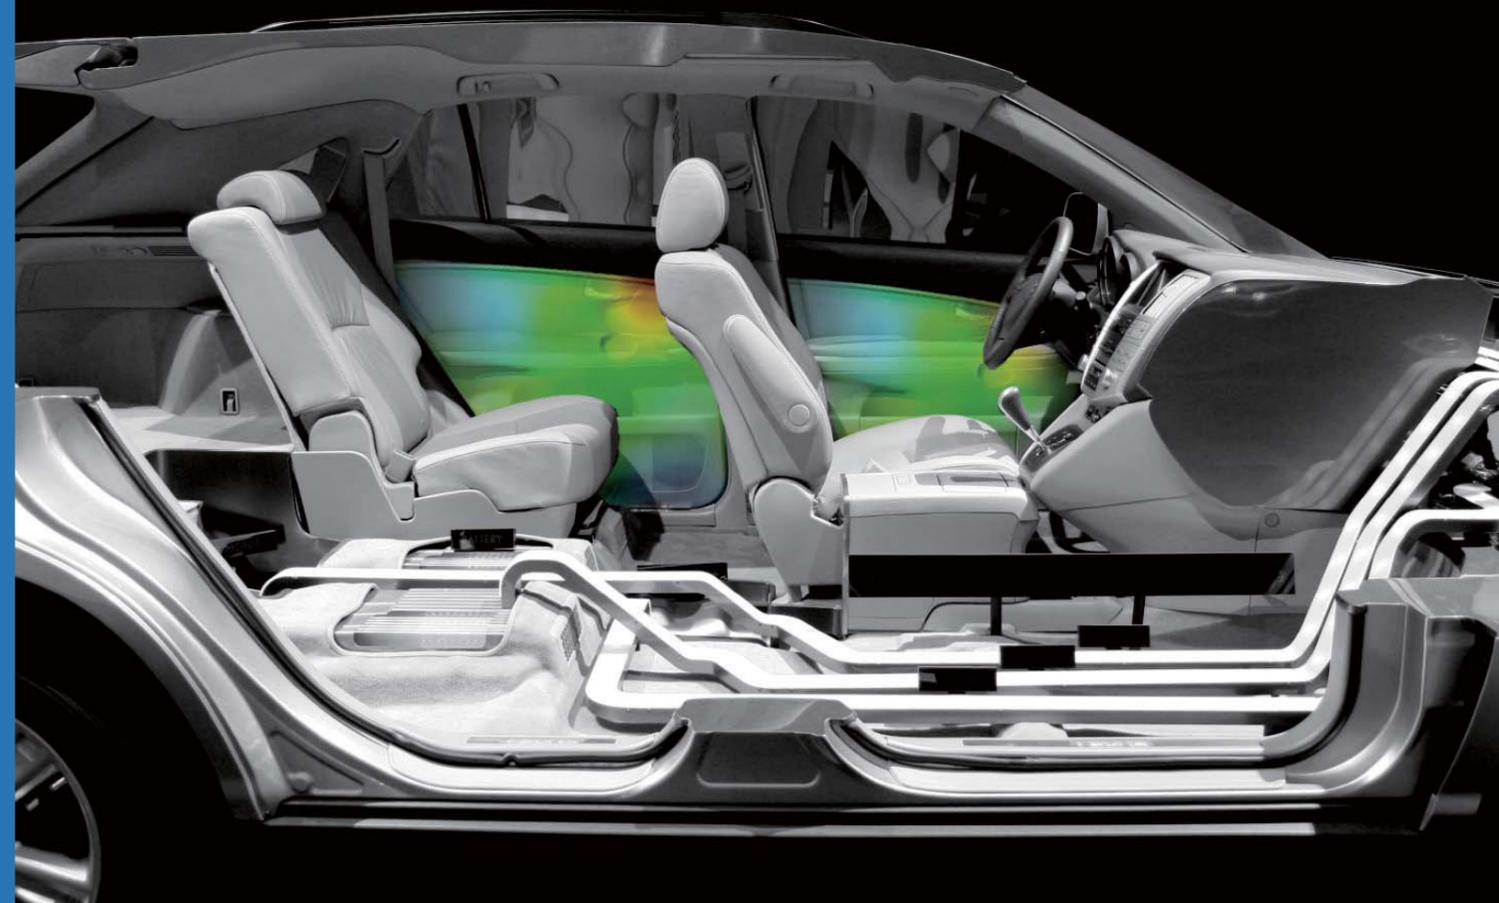


Moldex3D

CoreTech System Co., Ltd.
mail@moldex3d.com
For more information, please visit www.moldex3d.com

© 2016 CoreTech System (Moldex3D). All rights reserved.
DM-Full-R14.0-EN-16-V1

Key to Your Core Competitiveness

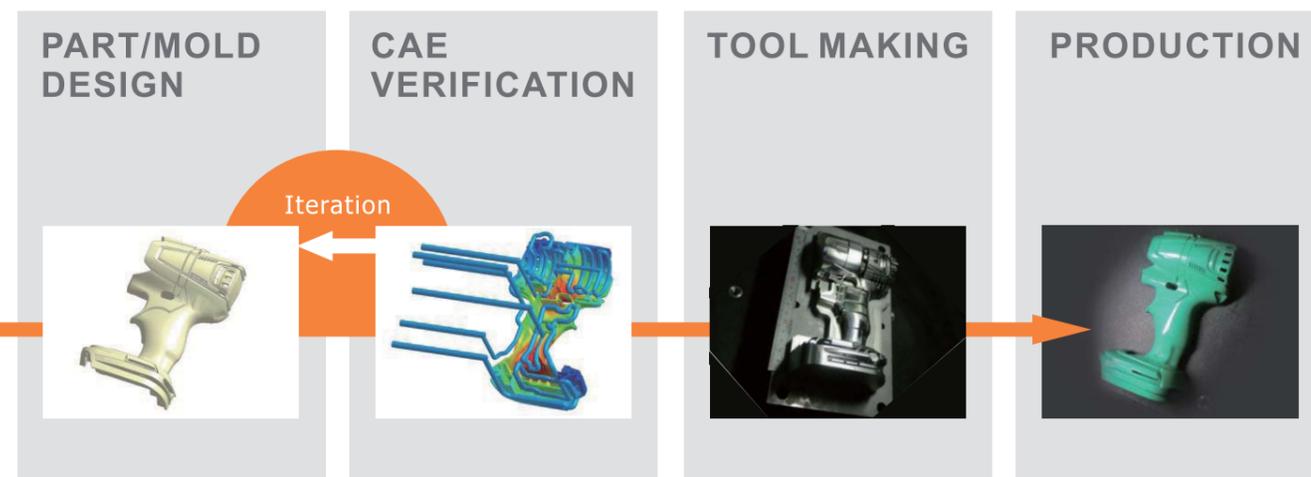

Moldex3D helps you simulate and visualize versatile injection molding processes to validate and optimize your plastic designs, increase manufacturability, shorten time-to-market and maximize Return on Investment (ROI).

Optimize Part/Mold Design Process


In time of rapid-developing market and technology, CAE technology assists users in saving time, effort, and expense by detecting potential defects in the early stage of part/mold design. It is difficult to achieve by traditional trial-and-error approach.

Moldex3D has been leading 3D simulation and visualization technology for decades. No matter how simple or complex the part/mold products are, it predicts the issues and phenomena prior real manufacture only with a glance and several clicks even for starter. Moldex3D true 3D simulation technology is patented and validated with a good agreement between simulation and real cases. It helps users analyze the defect causes, evaluate the design revision, optimize the injection process conditions or materials, and catch up with the trend in industries. Moldex3D always keeps you forward by speeding up industrial innovation.

Cost Saving for Your Business

- Reduce cycle time and shorten time to market.
- Reduce the number of tool trials and scrap rate.
- Reduce electricity, time, and manpower costs which result from failed tool trials or inefficient manufacturing process.
- Reduce manufacturing cost, increase margin rate, increase revenue and ROI.
- Extend mold life.


Boost Work Efficiency in Pre-processing

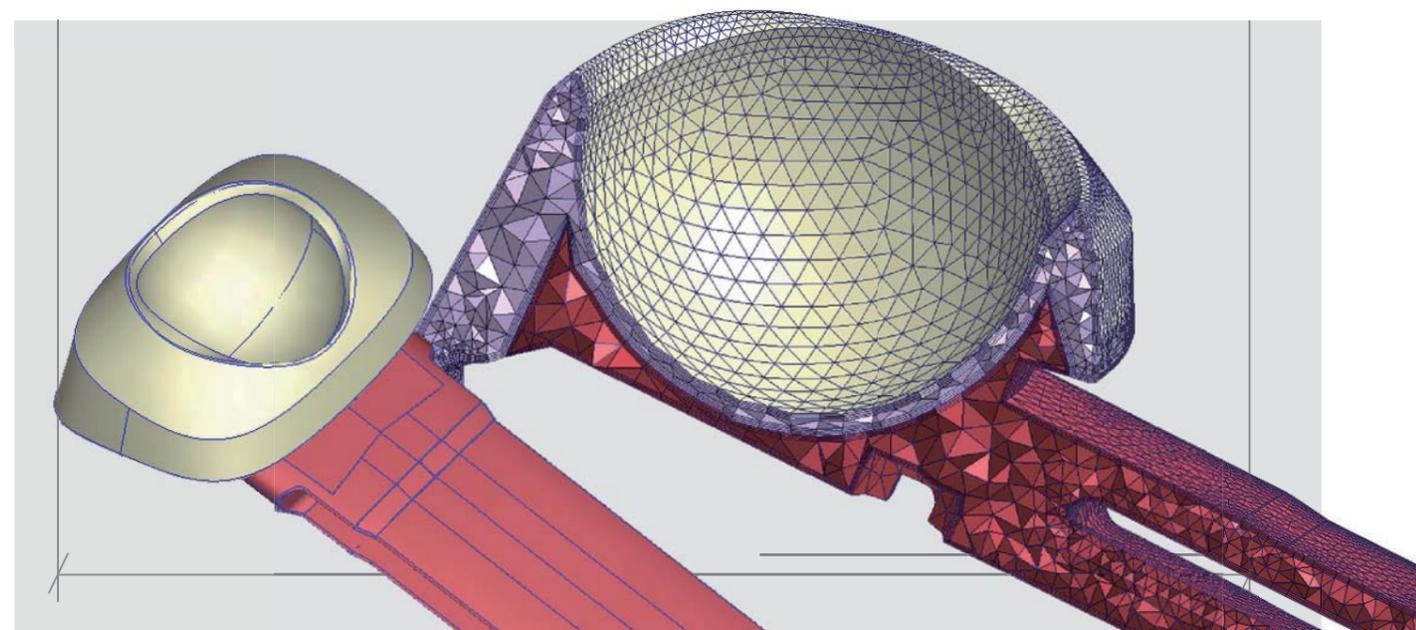

Meshing

Automatic 3D Meshing Engine (eDesign)

- Support auto mesh generation for saving time and variant level of mesh generation with intelligent wizards.



High Resolution 3D Mesh Technology (BLM)

- Support auto mesh generation, especially for complicated 3D geometry, with less complex and faster workflow.
- Fit its flexibility of mesh generator to advanced industrial molding processes.
- Enhance solver accuracy for viscous heating, pressure simulation, and warpage prediction.
- Support tetra elements and Boundary Layer Mesh (BLM).

Hybrid Mesh Technology


- Create mesh manually for the most customized purpose.
- Increase mesh resolution significantly with acceptable element count.
- Control uniform or biasing mesh pattern and element layer count in thickness direction by users.
- Support tetra, hexahedral, prism and pyramid elements.



Integrated Geometry Healing Tool

CADdoctor

- Enable multi-CAD data exchange between Moldex3D preprocessing and multi-CAD platform.
- Fix the defects of part and simplify the complicated geometry structure with high-quality surfaces and entities for better BLM generation.




CAD Interoperability

eDesignSYNC

- Integrate with PTC Creo, NX, and SOLIDWORKS.
- Enable CAD users to quickly validate part designs directly in familiar CAD/CAM environments.
- Provide the automatic mesh engine and intelligent wizards for CAE analysis and help to build a complete injection molding system in CAD environment.

Validate and Optimize with Plastics Injection Molding Simulation

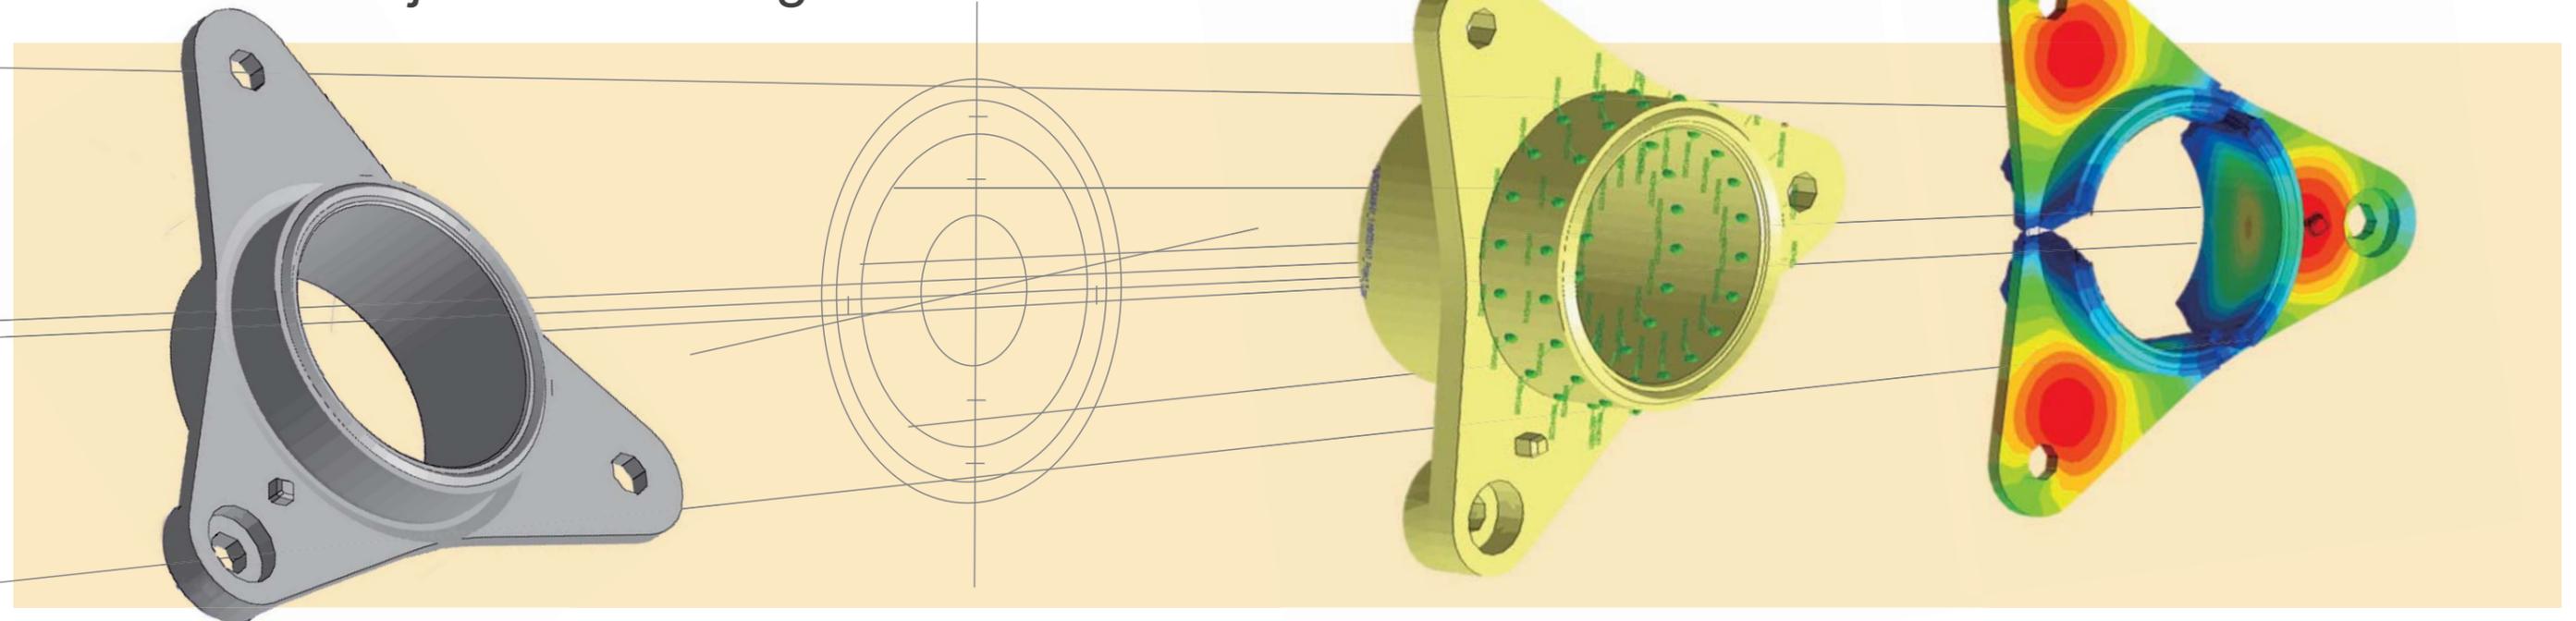


Standard Injection Molding Solutions

Predict upfront more than 85% of common manufacturing problems, such as short shot, flow imbalance, air trap, or sink mark. It greatly improves part quality, structure, and appearance.


Flow

- Visualize melt front.
- Predict locations of weld line or air trap.
- Optimize gate size and locations.
- Optimize process conditions in filling stage, such as injection time, melt temperature, ram speed profile, etc.



Cool

- Improve cooling efficiency.
- Reduce cycle time.
- Predict hot spots.
- Support cooling channel network analysis.
- Design and verify an effective conformal cooling.



Pack

- Evaluate gate frozen time.
- Avoid sink mark, flash, or bleeding.
- Optimize packing profile.
- Predict areas of high volumetric shrinkage.
- Predict the requirement of clamping force.



Warp

- Predict final part shape.
- Identify warpage causes.
- Calculate residual stress.
- Evaluate fiber orientation effect on warpage.
- Export inverse warpage shape.




Reactive Injection Molding (RIM)

- Simulate thermoset injection molding.
- Simulate cavity filling, curing, part warpage, fiber orientation, multi-component molding, etc.

Multi-Component Molding (MCM)


- Predict warpage with different materials.
- Detect potential re-melt issue.



DOE & Optimization

Expert



- Create analysis variation and provide graphical summaries automatically.
- Evaluate the optimal process conditions, such as packing time, cooling time, or mold temperature.



Injection Molded Plastic Optics

Optics

- Predict flow- or thermally-induced birefringence, retardation, fringed orders, and fringed patterns.
- Integrate with CODE V by providing non-uniform refractive index prediction and deformed shape.



Viscoelasticity (VE)


- Analyze the viscous and elastic properties of polymeric materials.
- Calculate flow-induced residual stress, warpage, and optical properties (with Optics module).

Stress


- Predict stress and displacement distributions of parts and part inserts.
- Evaluate displacements of plastics under certain external loadings.
- Support FSI (Fluid-structure interaction) calculation.
- Predict annealing with Viscoelasticity.

High-Performance Parallel Processing (PP)

- Speed up analysis by utilizing the strength of multi-core, multi-CPU, and multi-PC cluster.

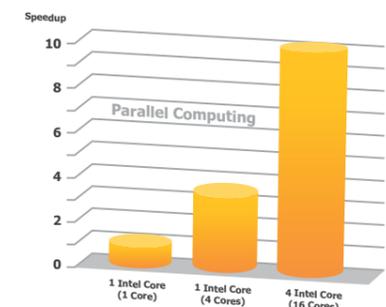


Meeting Growing Demands of Lightweight Composite Products.

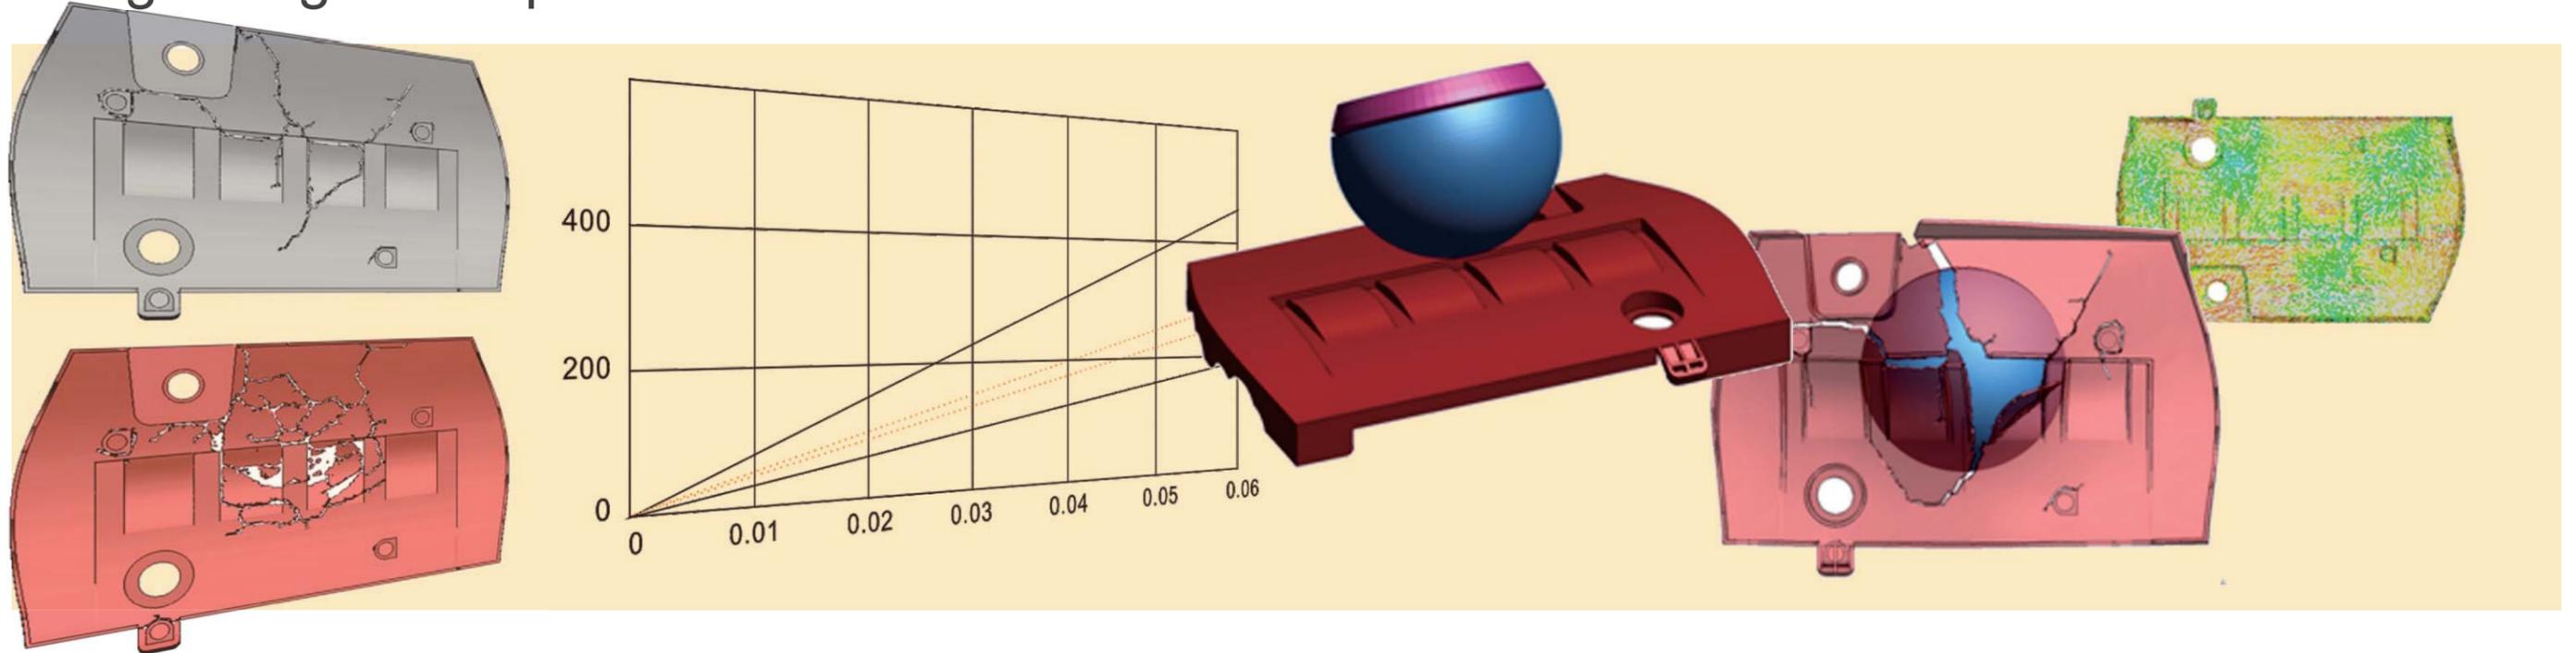


Fiber

- Visualize fiber orientation, length, and concentration for short and long fiber-reinforced plastics.

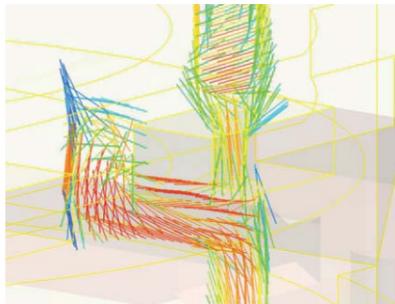


- Calculate thermo-mechanical properties and optimize process conditions to enhance the strength of plastics.
- Evaluate the strength of parts and weld line regions. Support flake orientation simulation.

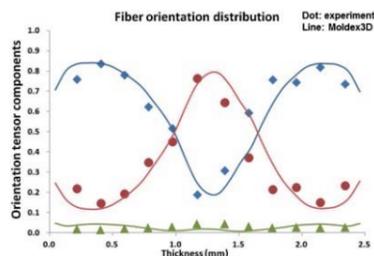

FEA/Micromechanics Interface

- Export fiber orientation, material anisotropy, residual stresses, and molding pressure to structural software.
- Validate the structural performance of products and mold sustainability.

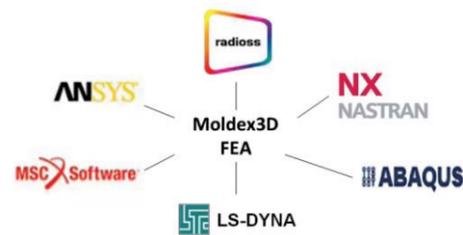


Moldex3D Digimat-RP

- Bridge manufacturing process and FEA analysis.
- Predict the mechanical behaviors with nonlinear material modeling technology for reinforced plastic
- Edit material properties and criteria of failure properties for reinforced plastic.




Compression Molding (CM)

- Visualize pressure distribution, volume shrinkage, residual stress distribution and fiber orientation, etc.
- Predict potential molding defects, such as bleeding or flashing.




Injection Compression Molding (ICM)

- Visualize property changes in the compression molding process over time.
- Calculate residual stress and evaluate process designs.



MuCell®

- Visualize the filling behavior of the polymer-gas solution into the cavity.
- Visualize bubble density and size considering the bubble nucleation and growth.
- Evaluate the surface quality, bubble effects, weight reduction, tonnage reduction and shrinkage reduction, etc.

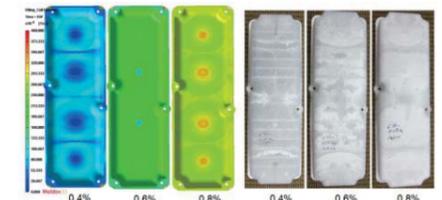


Resin Transfer Molding (RTM)

- Control resin infusion by pressure or flow rate.
- Capture cure reaction trend during molding through viscosity and kinetics models.




Injection Temperature Matters: Heat and Cool Management

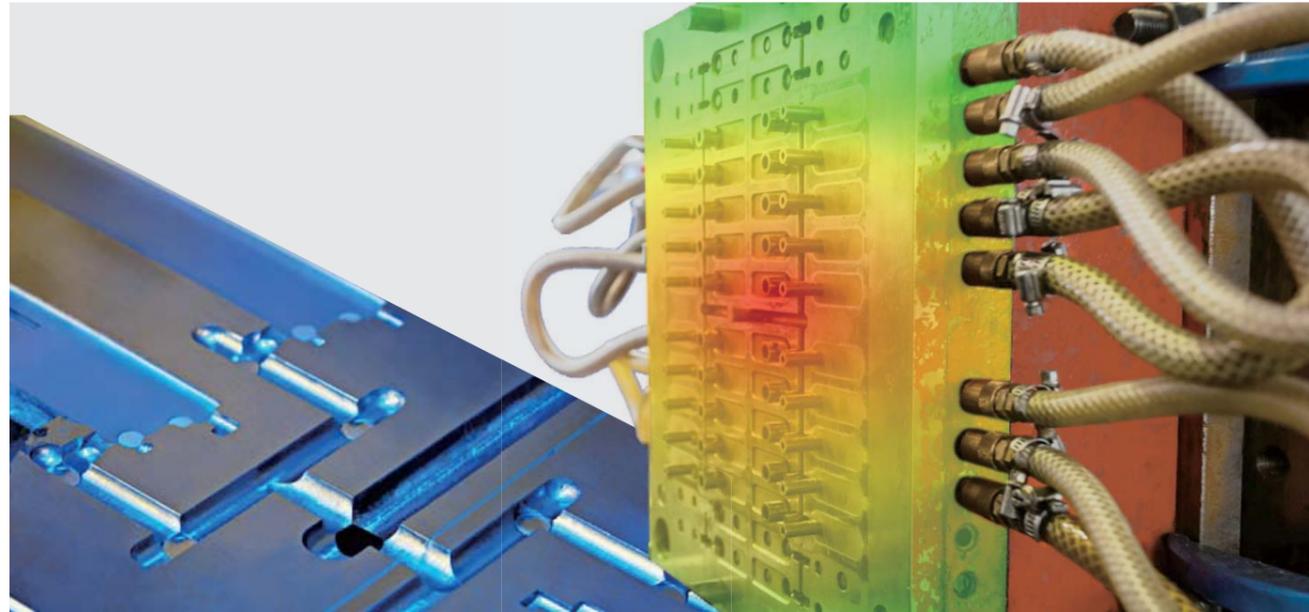


Transient Cool

- Support various dynamic variotherm technologies, including Heat & Cool™, Induction Heating Molding (IHM), and Electricity Heating Mold (E-Mold), etc.
- Utilize rapid temperature-changing molding process to increase melt fluidity in the filling stage and further improve part quality within a reasonable cycle time.




Advanced Hot Runner

- Visualize temperature distributions over time in hot runners and moldbase.
- Predict problems, such as non-uniform melt - temperature, unbalanced filling, etc.
- Support quick steady analysis for complex hot runner layout design.



3D Coolant CFD

- Simulate water flow in 3D cooling channels to guarantee cooling efficiency.
- Visualize the streamline direction and predict hot spots.
- Optimize cooling system design and achieve cycle time reduction.



Cooling Channel Designer (CCD)

- Create conformal cooling channels automatically based on the contour of product.
- Provide a fast and intuitive workflow to build complex cooling system.

Innovative Molding Processes



Gas/Water-Assisted Injection Molding (GAIM/WAIM)

- Specify the gas/fluid injection from single or multiple gas entrances or from the melt entrance.
- Optimize gas/fluid channel designs and locations of gas/fluid entrances.
- Visualize the skin thickness and core-out ratio distributions and predict corner effect and blow through.




Powder Injection Molding (PIM)

- Visualize flow behaviors of the feedstock.
- Predict black line due to phase separation of powder and binder (non-uniform powder concentration).




Co-Injection Molding

- Visualize the flow behaviors of skin and core materials.
- Optimize geometry thickness and process conditions based on core breakthrough prediction.
- Consider temperature imbalance and pressure resistance variations of skin layer and center core.

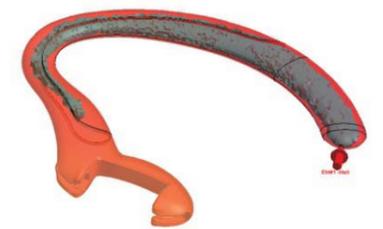

Bi-Injection Molding

- Define independent melt entrances and filling/packing parameters for different materials.
- Visualize the melt front time for each melt entrance in the filling stage.
- Predict weld line through melt front advancement.



Product Portfolio and Features

Product Package & Mesh Technology

● Essential features contained | ○ Optional features

	eDesign Basic	eDesign	Professional	Advanced
True 3D Mesh				
eDesign	●	●	●	●
Boundary Layer Mesh, Tetra			●	●
Solid (Hexa, Prism, Pyramid, Hybrid)				●
2.5D Mesh				
Shell				●

Standard Injection Molding

	eDesign Basic	eDesign	Professional	Advanced
Solver Capabilities				
Simultaneous Filling Analysis (max.)	1	1	1	3*
Parallel Processing (PP)	4	4	8	12
Thermoplastic Injection Molding	●	●	●	●
Reaction Injection Molding (RIM)	●	●	●	●
Simulation Capabilities				
Filling	●	●	●	●
Surface Defect Prediction	●	●	●	●
Venting Analysis	●	●	●	●
Gate Location	●	●	●	●
Cold & Hot Runners	●	●	●	●
Runner Balancing	●	●	●	●
Packing		●	●	●
Cooling		●	●	●
Transient Mold Cooling or Heating		●	●	●
Conformal Cooling		●	●	●
3D Coolant CFD		○	●	●
Rapid Temperature Cycling		●	●	●
Induction Heating		●	●	●
Heating Elements		●	●	●
Warpage		●	●	●
Insert Molding		●	●	●
In-Mold Label			●	●
Multi-shot Sequential Molding		●	●	●

Solution Add-on

● Essential features contained | ○ Optional features

	eDesign Basic	eDesign	Professional	Advanced
CAD Interoperability				
eDesignSYNC	○	○	○	○
CADdoctor	○	○	○	○
Cooling Channel Designer (CCD)		○	○	○
Fiber Reinforced Plastics				
Fiber	○	○	○	○
Stress		○	○	○
FEA Interface		○	○	○
Micromechanics Interface		○	○	○
Moldex3D Digimat-RP		○	○	○
DOE				
Expert		○	○	○
Thermal				
Advanced Hot Runner		○	○	○
Optical				
Optics				○
Viscoelasticity (VE)		○	○	○
Special Molding Processes				
Powder Injection Molding (PIM)	○	○	○	○
MuCell®		○	○	○
Gas-Assisted Injection Molding (GAIM)			○	○
Water-Assisted Injection Molding (WAIM)			○	○
Co-Injection Molding			○	○
Bi-Injection Molding			○	○
Compression Molding (CM)				○
Injection Compression Molding (ICM)				○
Resin Transfer Molding (RTM)				○

*Including two eDesign Flow

- 1.Moldex3D eDesignSYNC supports PTC Creo, NX, and SOLIDWORKS.
- 2.Moldex3D FEA Interface supports Abaqus, ANSYS, MSC.Nastran, Nastran, NX Nastran, LS-DYNA, MSC.Marc, and Radioss.
- 3.Moldex3D Micromechanics Interface supports Digimat and CONVERSE.
- 4.Database: Thermoplastics materials, thermoset materials, molding materials, coolant materials, and mold materials.
- 5.MuCell® is a registered trademark of Trexel, Inc.

System Requirements

Platform	Windows	Windows 10, 8, 7, Server 2012, 2008, HPC Server 2008
Hardware	Minimum	Intel® Core i7 processor, 16 GB RAM, and at least 1 TB free space
	Recommended	Intel® Xeon® E5 processor, 32 GB RAM, and at least 2 TB free space